



RIKEN
NiSHiNA
CENTER

SHOGUN

*a next generation γ ray spectrometer
for fast beams at the RIBF*

Heiko Scheit

紗糸 侂子



January 11, 2011

2011年1月11日



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

S cintillator based

H igh-res**O** lution

O

G amma-ray spectrometer for

U nstable

N uclei

- γ ray spectrometer optimized for **in-beam** γ ray spectroscopy at **RIBF beam energies**
- Construction proposal submitted to last NP-PAC (Dec. 2009)



SHOGUN

Doppler Effect |

Doppler Shift

Doppler Broadening

Emission Angle

Velocity

Summary

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

Doppler Shift and Broadening




Doppler Shift

- Lorentz transformation of 4-momenta between laboratory frame and frame of emitting nucleus

$$E_\gamma = \frac{E_0}{\gamma(1 - \beta \cos \theta)} \quad d\Omega_0 = \left(\frac{E_\gamma}{E_0}\right)^2 d\Omega$$

$$\gamma = \frac{1}{\sqrt{1 - \beta^2}}$$

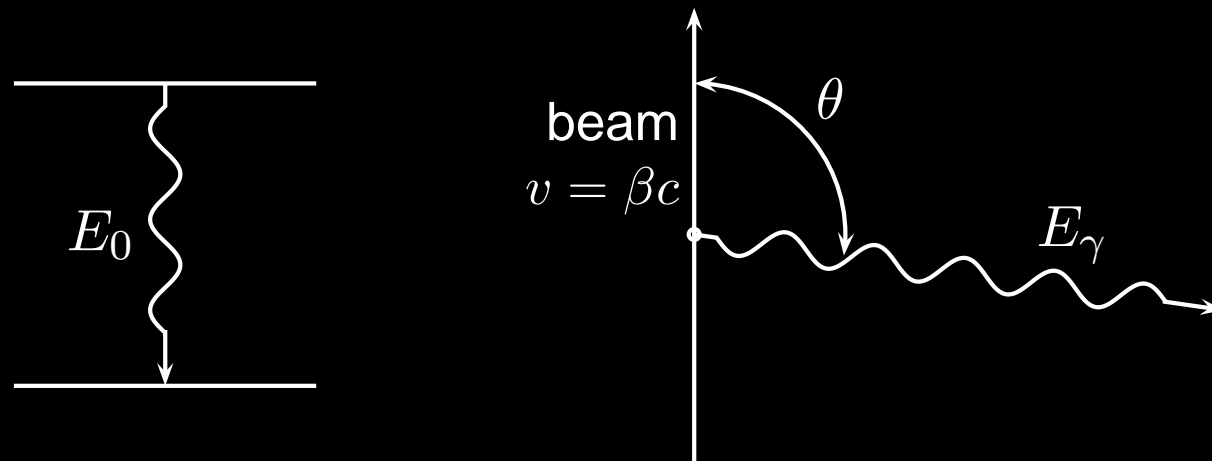

SHOGUN

Doppler Effect

Doppler Shift

Doppler Broadening

Emission Angle

Velocity

Summary

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Doppler Broadening

Due to:

- uncertainty in beam velocity β : $\Delta\beta$
- uncertainty of emission angle θ : $\Delta\theta$

$$\Delta E^2 = \left(\frac{\partial E}{\partial \beta} \right)^2 \Delta\beta^2 + \left(\frac{\partial E}{\partial \theta} \right)^2 \Delta\theta^2$$

$$\frac{1}{E} \frac{\partial E}{\partial \beta} = \frac{\cos(\theta)}{1 - \beta \cos(\theta)} - \beta\gamma^2$$

$$\frac{1}{E} \frac{\partial E}{\partial \theta} = \frac{\beta \sin(\theta)}{1 - \beta \cos(\theta)}$$

- must reduce $\Delta\beta$ and $\Delta\theta$

SHOGUN

Doppler Effect

Doppler Shift

Doppler Broadening

Emission Angle

Velocity

Summary

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives


Light Conversion

Summary



Doppler Broadening: Emission Angle

- SHOGUN
- Doppler Effect
- Doppler Shift
- Doppler Broadening
- Emission Angle**
- Velocity
- Summary
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Problems
- Alternatives
- Light Conversion
- Summary

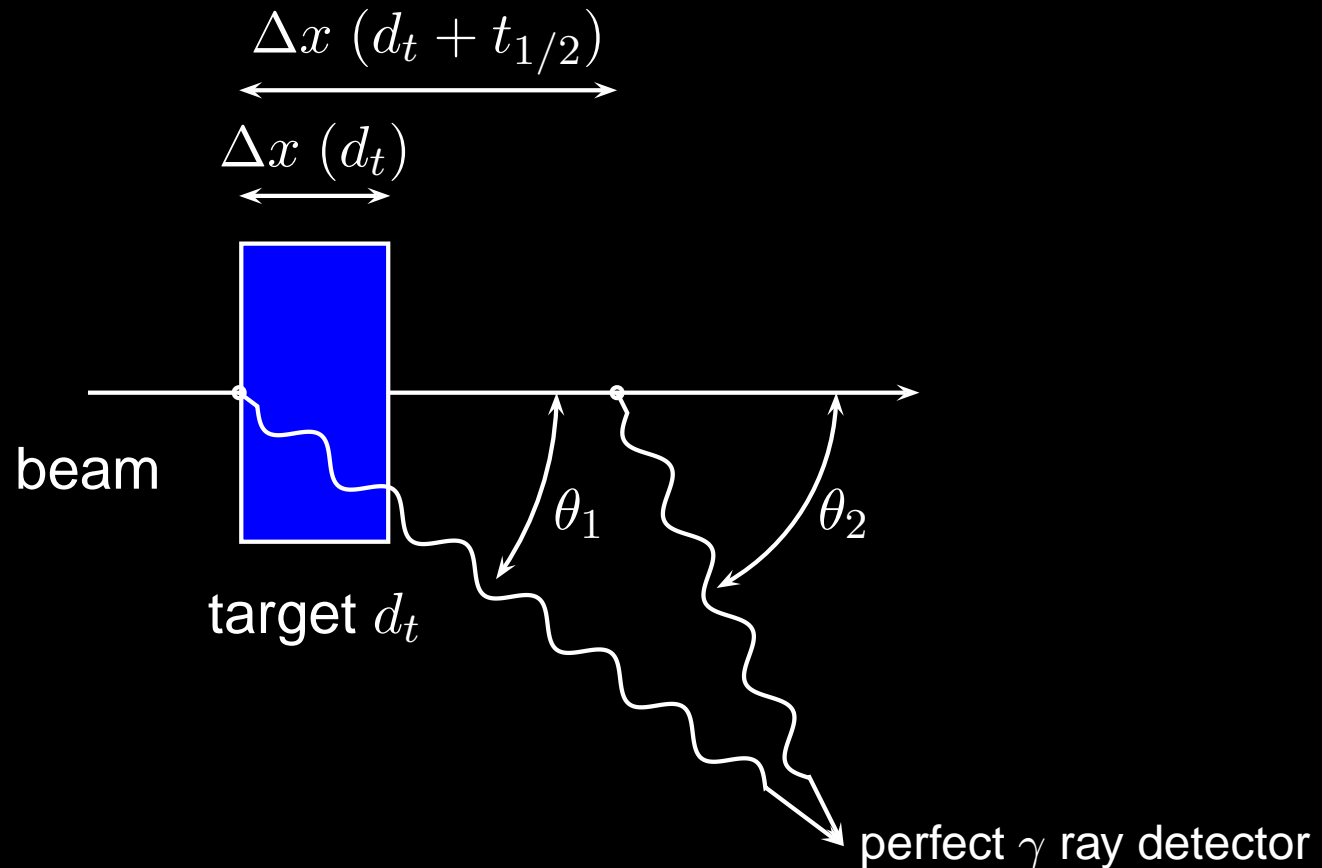

Uncertainty Δx of point of γ emission due to

- target thickness: $d_t \sim 1 \dots 20$ mm
- γ decay in-flight: 100 ps \Rightarrow 15 mm



Doppler Broadening: Velocity

SHOGUN

Doppler Effect

Doppler Shift

Doppler Broadening

Emission Angle

Velocity

Summary

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide


SHOGUN

Problems

Alternatives

Light Conversion

Summary

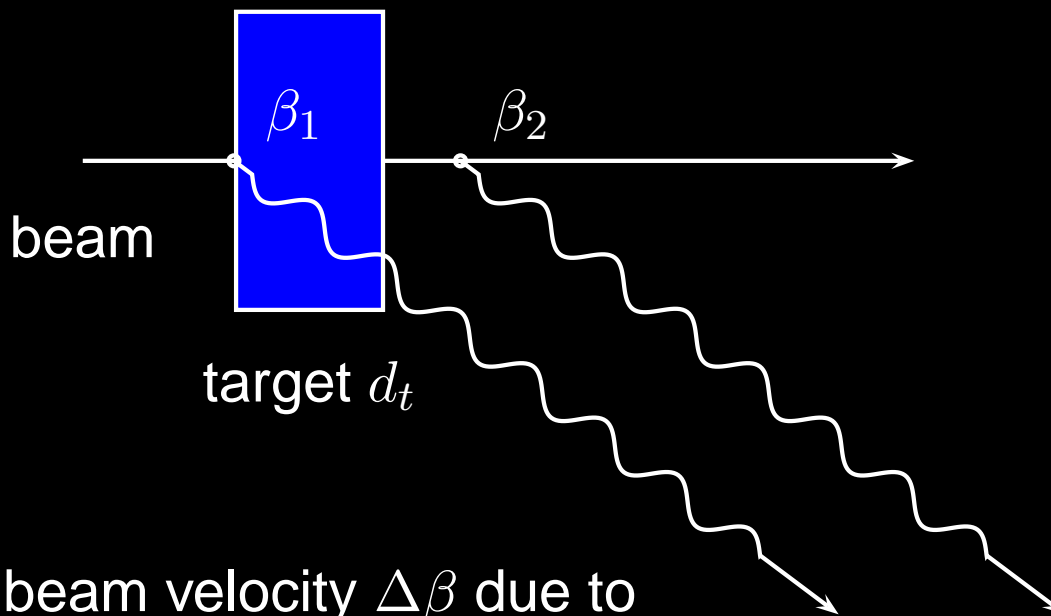

Uncertainty in beam velocity $\Delta\beta$ due to

- energy loss in the target: $\Delta E \sim 10\text{--}20\%$

$$\frac{\Delta\beta}{\beta} \sim \begin{cases} 5\text{--}10\% & \text{if } \gamma\beta t_{1/2} < d_t \\ \text{small} & \text{if } \gamma\beta t_{1/2} > d_t \end{cases}$$

- very small uncertainty in beam velocity vector $\vec{\beta}_2$
 - beam mom. spread and reaction mech. do not contribute to $\Delta\beta$



Doppler Broadening: Summary

- There is a sizable **Doppler broadening** even with a perfect detector, due to an **uncertainty**
 - in the **beam velocity** and (energy loss in the target)
 - in the **emission point** of the γ ray (target thickness, lifetime of excited state)
- These contributions are **not due** to detector properties.

SHOGUN

Doppler Effect

Doppler Shift

Doppler Broadening

Emission Angle

Velocity

Summary |

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



SHOGUN

Doppler Effect

In-beam γ at RIBF |

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

In-beam γ ray Spectroscopy at the RIBF



Boundary Conditions

for in-beam γ ray spectroscopy at the RIBF:

- beam energy: 200 MeV/u $v/c = \beta = 0.5$

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Boundary Conditions

for in-beam γ ray spectroscopy at the RIBF:

- beam energy: 200 MeV/u $v/c = \beta = 0.5$
- target thickness: $d_t \sim 1 \dots 20$ mm
- γ decay in-flight: 100 ps \Rightarrow 15 mm
- achievable angular resolution: $\Delta\theta = 3^\circ = 50$ mrad
(assuming a detector distance of 25 cm)

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Boundary Conditions

for in-beam γ ray spectroscopy at the RIBF:

- beam energy: 200 MeV/u $v/c = \beta = 0.5$
- target thickness: $d_t \sim 1 \dots 20$ mm
- γ decay in-flight: 100 ps \Rightarrow 15 mm
- achievable angular resolution: $\Delta\theta = 3^\circ = 50$ mrad
(assuming a detector distance of 25 cm)
- 10–20% energy loss in target: $\Delta\beta = 5\text{--}10\%$
- NB: $\Delta\theta$ does not include detector contributions

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Angular and Velocity Uncertainties

for in-beam γ ray spectroscopy at the RIBF:

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties |

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

lifetime of excited state



target thickness



Angular and Velocity Uncertainties

for in-beam γ ray spectroscopy at the RIBF:

lifetime of excited state

$\Delta\theta$ small
 $\Delta\beta$ small

target thickness

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Angular and Velocity Uncertainties

for in-beam γ ray spectroscopy at the RIBF:

lifetime of excited state

$$\Delta\theta \text{ small}$$
$$\Delta\beta \text{ small}$$

$$\Delta\theta \sim 3^\circ$$
$$\Delta\beta/\beta \sim 5\%$$

target thickness

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Angular and Velocity Uncertainties

for in-beam γ ray spectroscopy at the RIBF:

lifetime of excited state \uparrow

$\Delta\theta \sim 3^\circ$
 $\Delta\beta$ small

$\Delta\theta$ small
 $\Delta\beta$ small

$\Delta\theta \sim 3^\circ$
 $\Delta\beta/\beta \sim 5\%$

target thickness \rightarrow

SHOGUN

Doppler Effect

In-beam γ at RIBF

Boundary Conditions

Uncertainties

Doppler Broadening

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives


Light Conversion

Summary



Doppler Broadening


- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Boundary Conditions
- Uncertainties
- Doppler Broadening
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Problems
- Alternatives
- Light Conversion
- Summary

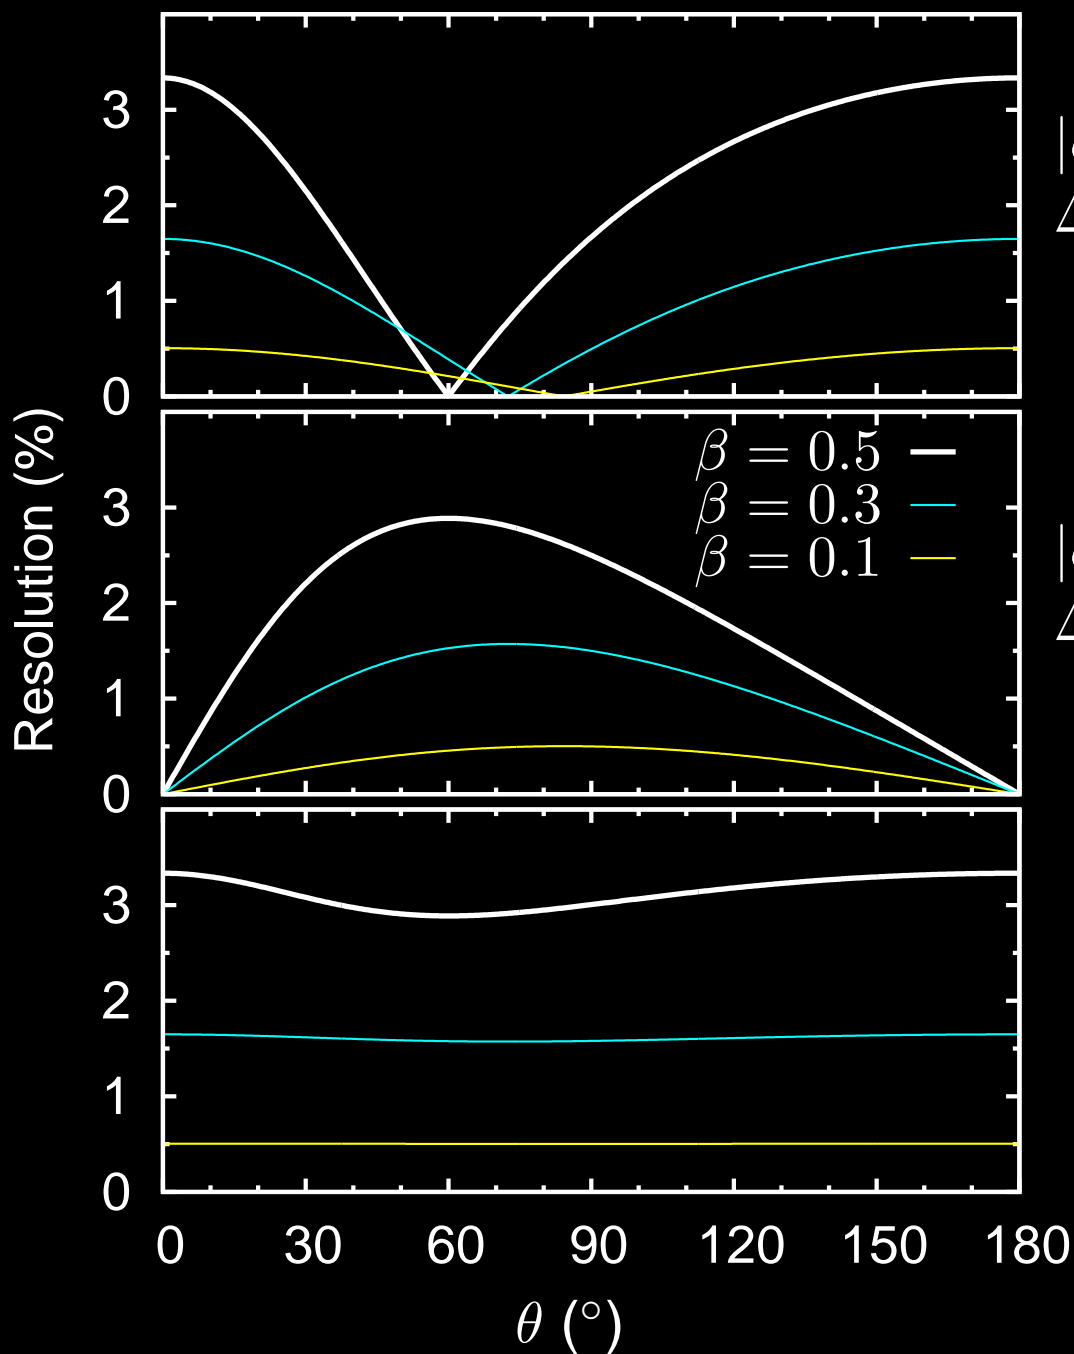



Doppler Broadening

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Boundary Conditions
- Uncertainties
- Doppler Broadening
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Problems
- Alternatives
- Light Conversion
- Summary

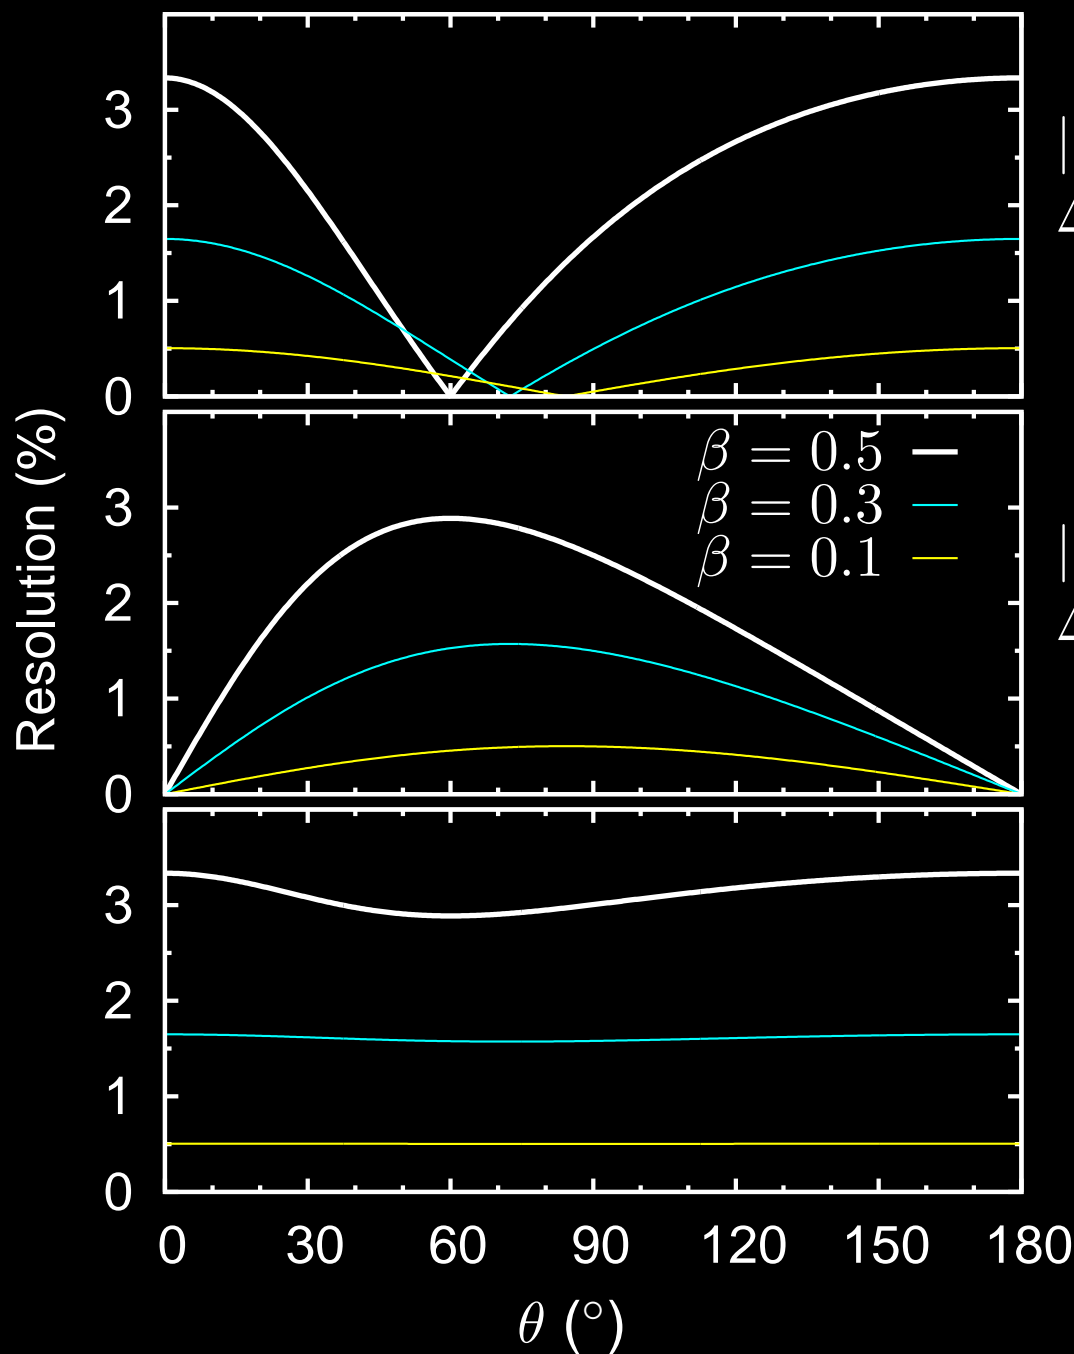

$$|\partial E / \partial \beta| \cdot \Delta \beta$$
$$\Delta \beta / \beta = 5\%$$

$$|\partial E / \partial \theta| \cdot \Delta \theta$$
$$\Delta \theta = 50 \text{ mrad}$$

achievable
energy resolution:

3%



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector? |

Which Detector?

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

Which Detector?



Which detector should be used?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector? |

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

RIKEN

CNS GRAPE **OR**

DALI2



Which detector should be used?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector? |

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

RIKEN

CNS GRAPE

OR

DALI2

MSU

SeGA

OR

CAESAR/APEX



Which detector should be used?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector? |

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

RIKEN

CNS GRAPE

OR

DALI2

MSU

SeGA

OR

CAESAR/APEX

GSI

RISING

OR

HD-DA Crystal Ball



Which detector should be used?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector? |

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

RIKEN	CNS GRAPE	OR	DALI2
MSU	SeGA	OR	CAESAR/APEX
GSI	RISING	OR	HD-DA Crystal Ball
GANIL	EXOGRAM	OR	Chateau de Cristal



Which detector should be used?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector?

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

RIKEN

CNS GRAPE

OR

DALI2

MSU

SeGA

OR

CAESAR/APEX

GSI

RISING

OR

HD-DA Crystal Ball

GANIL

EXOGRAM

OR

Chateau de Cristal

HPGe based

OR

scintillator based



Which detector should be used?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector?

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

RIKEN

CNS GRAPE

OR

DALI2

MSU

SeGA

OR

CAESAR/APEX

GSI

RISING

OR

HD-DA Crystal Ball

GANIL

EXO GAM

OR

Chateau de Cristal

HPGe based

OR

scintillator based

(good)
resolution

OR

good
efficiency



Problems of Current Arrays

(for in-beam γ ray spectroscopy with fast beams)

- HPGe
 - high intrinsic resolution cannot be utilized
 - very high cost for high efficiency array
 - large operational costs

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector?

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Problems of Current Arrays

(for in-beam γ ray spectroscopy with fast beams)

- HPGe
 - high intrinsic resolution cannot be utilized
 - very high cost for high efficiency array
 - large operational costs
- Scintillator (NaI(Tl), CsI(Tl), CsI(Na))
 - very poor energy resolution

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector?

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



Problems of Current Arrays

(for in-beam γ ray spectroscopy with fast beams)

- HPGe
 - high intrinsic resolution cannot be utilized
 - very high cost for high efficiency array
 - large operational costs
- Scintillator (NaI(Tl), CsI(Tl), CsI(Na))
 - very poor energy resolution
- both
 - relatively poor time resolution
 - count rate is limited

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Which Detector?

Problems

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide I

Which detector?

LaBr₃ (Ce)

LaBr₃ (Ce)

SHOGUN

Problems

Alternatives

Light Conversion

Summary

Lanthanum Bromide



Which detector?

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

Which detector? |

LaBr₃(Ce)

LaBr₃(Ce)

SHOGUN

Problems

Alternatives

Light Conversion

Summary

LaBr₃(Ce) based detectors!



LaBr₃(Ce)

- new scintillation crystal invented in 2001 by Delft University, Netherlands; licensed to Saint-Gobain
- marketed under name: Brill**LanCe** 380

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

Which detector?

LaBr₃(Ce) |

LaBr₃(Ce)

SHOGUN

Problems

Alternatives

Light Conversion

Summary



LaBr₃(Ce)

- new scintillation crystal invented in 2001 by Delft University, Netherlands; licensed to Saint-Gobain
- marketed under name: Brill**LanCe** 380
- most remarkable property:
 - energy resolution of **2.6%** at 662 keV
 - compare to NaI(Tl): 6.5%

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

Which detector?

LaBr₃(Ce) |

LaBr₃(Ce)

SHOGUN

Problems

Alternatives

Light Conversion

Summary



LaBr₃(Ce)

- new scintillation crystal invented in 2001 by Delft University, Netherlands; licensed to Saint-Gobain
- marketed under name: Brill**Lan**Ce 380
- most remarkable property:
 - energy resolution of **2.6%** at 662 keV
 - compare to NaI(Tl): 6.5%
- but, until recently no large(ish) crystals
 - strong anisotropic thermal expansion (a-axis: 22 ppm/K; c-axis: 8 ppm/K)
 - prone to cracking during cooling after growth
- now: “127 mm ingots . . . are routine” (Saint-Gobain)

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

Which detector?

LaBr₃(Ce)

LaBr₃(Ce)

SHOGUN

Problems

Alternatives

Light Conversion

Summary



LaBr₃(Ce)

- comparison to common scintillators:

	NaI(Tl)	BaF ₂	LaBr ₃ (Ce)
Light Output (1/keV)	38	2 10	> 71
Decay Time (ns)	250	.7 630	16
Z	11, 53	56, 9	57, 35
Density (g/cm ³)	3.67	4.88	5.1
Temp. Coef. (%/K)	-0.3	0 1.1	0.0
Max. Sc. Wavel. (nm)	415	220 310	380
Energy Res. (%)	7	12	2.5
Time Res. (ns)	2.5	0.2	0.2
Linearity	low	low	very high
Hygroscopic	yes	no	yes

- for same detector volume

$$\epsilon_{FEP} \propto \rho^{1.5} \times Z^{3.5}$$

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

Which detector?

LaBr₃(Ce)

LaBr₃(Ce) |

SHOGUN

Problems

Alternatives

Light Conversion

Summary



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN |

Detector Shape

Configurations

Setup at F8

Simulation

Simulation

Simulation

Energy Resolution

FEP Efficiency

SHOGUN 100

Problems

Alternatives

Light Conversion


Summary

SHOGUN



Detector Shape


- only one detector shape to reduce detector design/development cost
- possibly place 2–3 detector in one housing, to reduce inactive material
- cuboid: 1.5 cm × 4 cm × 8 cm

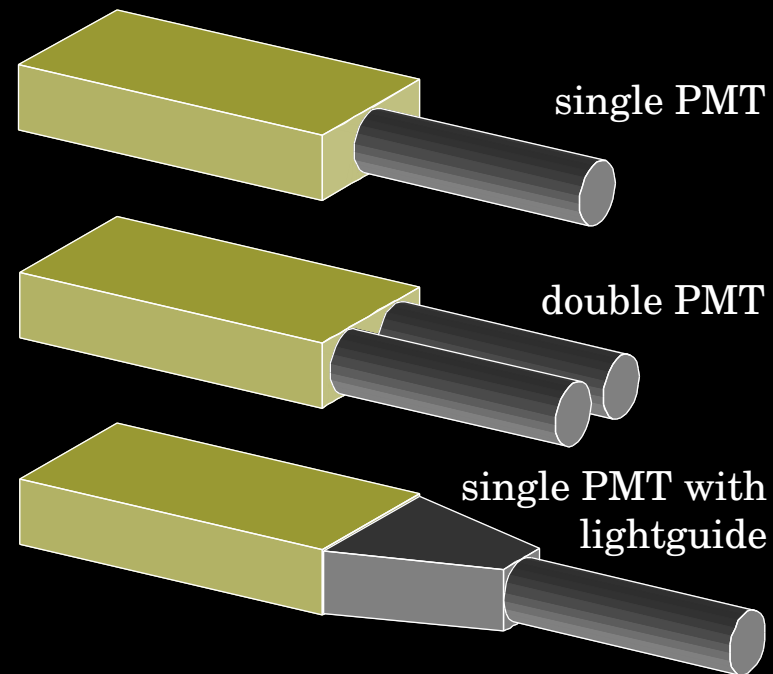

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Detector Shape**
- Configurations
- Setup at F8
- Simulation
- Simulation
- Simulation
- Energy Resolution
- FEP Efficiency
- SHOGUN 100
- Problems
- Alternatives
- Light Conversion
- Summary




Possible Configurations

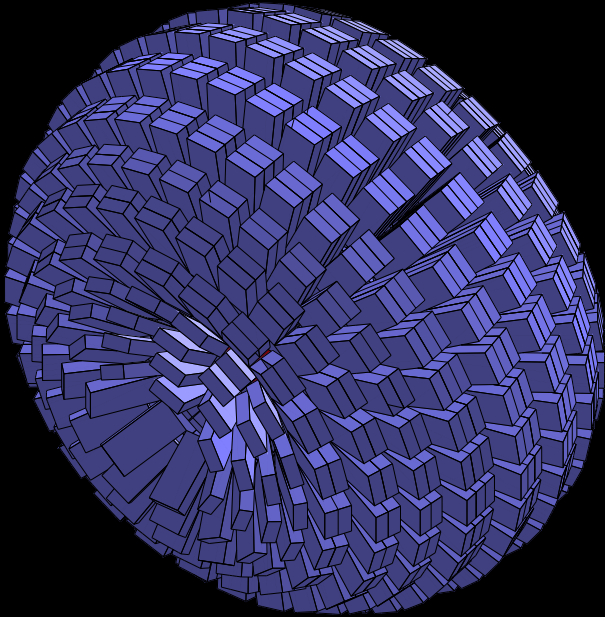


fast beam setup ($v = 0.6c$)			
	$\frac{\Delta E}{E}$ (%)	ϵ_γ (%)	$\epsilon_{\gamma\gamma}$ (%)
NaI(Tl) DALI2	10.0	23.5	5.5
RISING	1.9	2.8	0.08
SHOGUN 1000	3.2	35.0	12.2

$8 \times 4 \times 1.5 \text{ cm}^3$

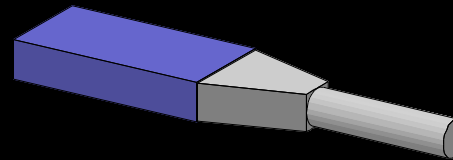





Possible Configurations

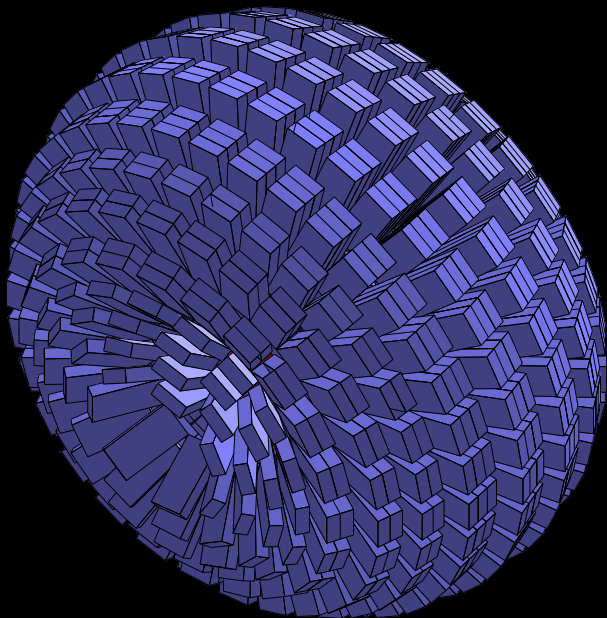

fast beam setup ($v = 0.6c$)			
	$\frac{\Delta E}{E}$ (%)	ϵ_γ (%)	$\epsilon_{\gamma\gamma}$ (%)
NaI(Tl) DALI2	10.0	23.5	5.5
RISING	1.9	2.8	0.08
SHOGUN 1000	3.2	35.0	12.2


$8 \times 4 \times 1.5 \text{ cm}^3$

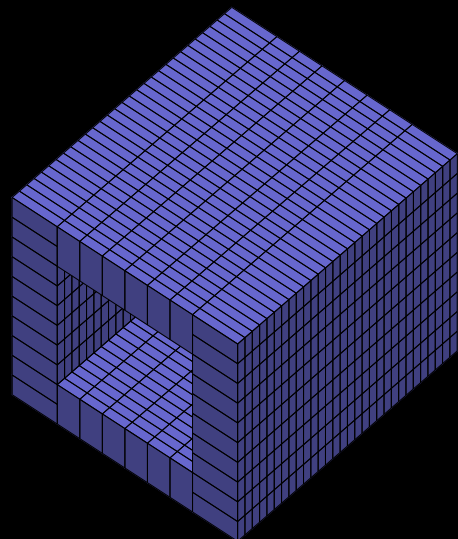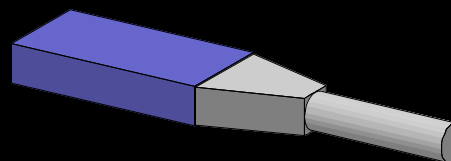

slow/stopped beam setup			
	$\frac{\Delta E}{E}$ (%)	ϵ_γ (%)	$\epsilon_{\gamma\gamma}$ (%)
RISING	0.2	15.0	2.25
SHOGUN 1000	2.4	56.0	31.3



Setup at F8

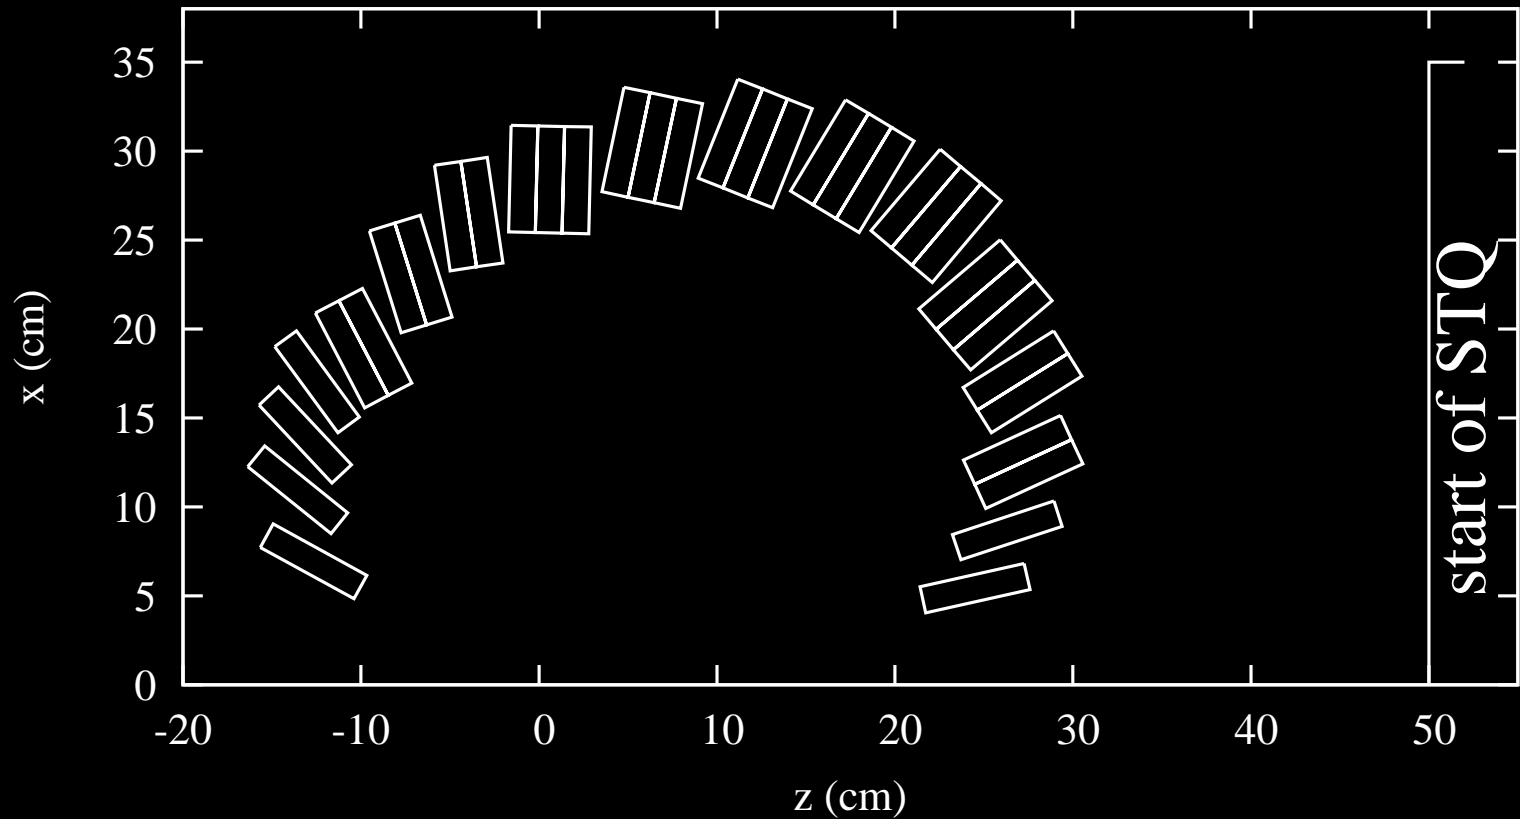

- easily fits at high acceptance position of ZeroDegree
- standard HPGe cannot be accommodated at forward angles

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Detector Shape Configurations
- Setup at F8
- Simulation
- Simulation
- Simulation
- Energy Resolution
- FEP Efficiency
- SHOGUN 100
- Problems
- Alternatives
- Light Conversion
- Summary



Simulation: SHOGUN 1000 and DALI2

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Detector Shape

Configurations

Setup at F8

Simulation

Simulation

Simulation

Energy Resolution

FEP Efficiency


SHOGUN 100

Problems

Alternatives

Light Conversion

Summary

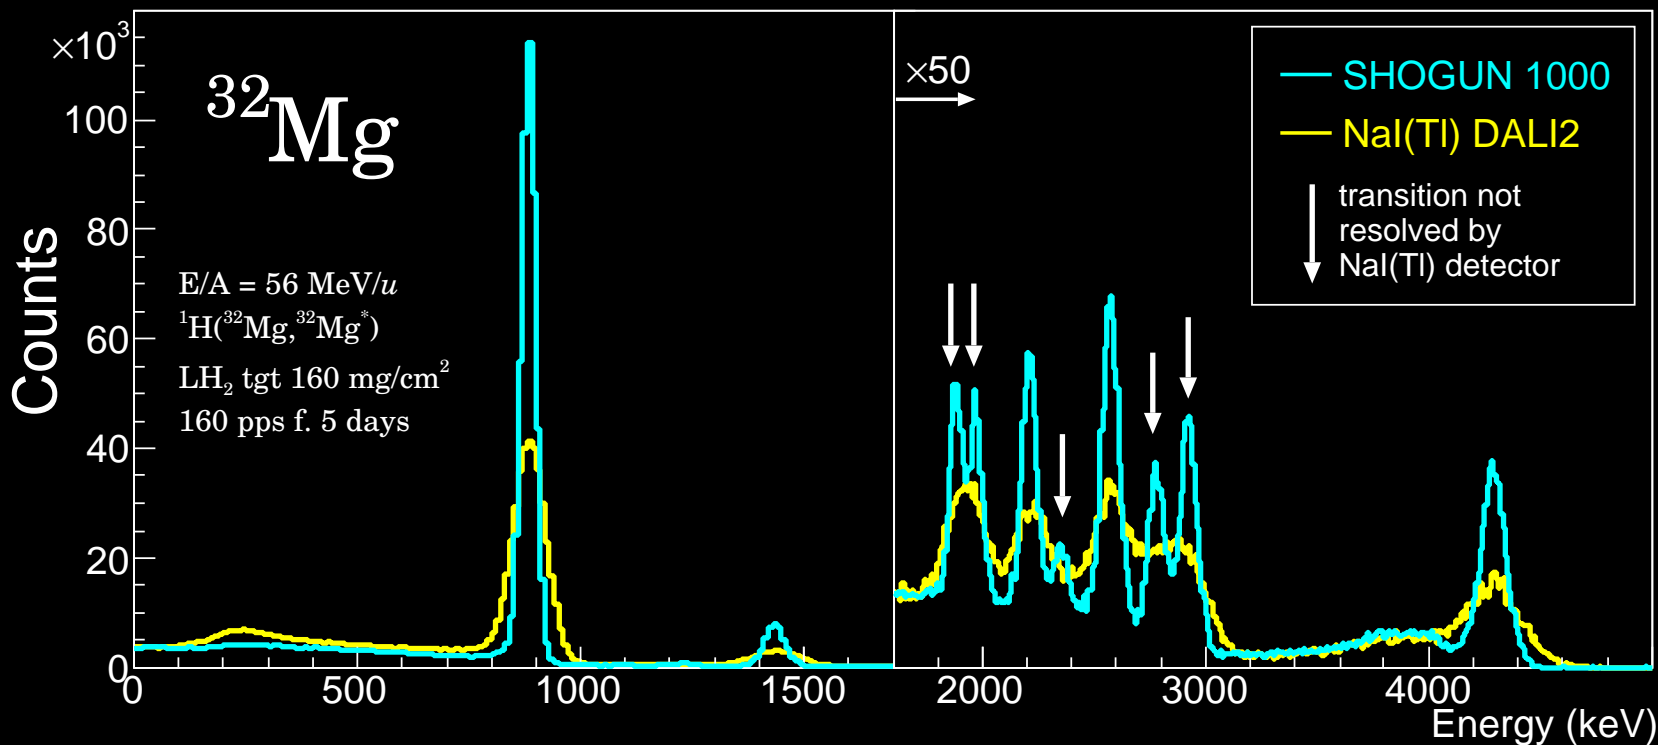


Simulation by P. Doornenbal
based on experimental data of
S. Takeuchi *et al.*, PRC 79, 054319 (2009)



Simulation: SHOGUN 1000 and DALI2

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Detector Shape
- Configurations
- Setup at F8
- Simulation
- Simulation
- Energy Resolution
- FEP Efficiency
- SHOGUN 100
- Problems
- Alternatives
- Light Conversion
- Summary

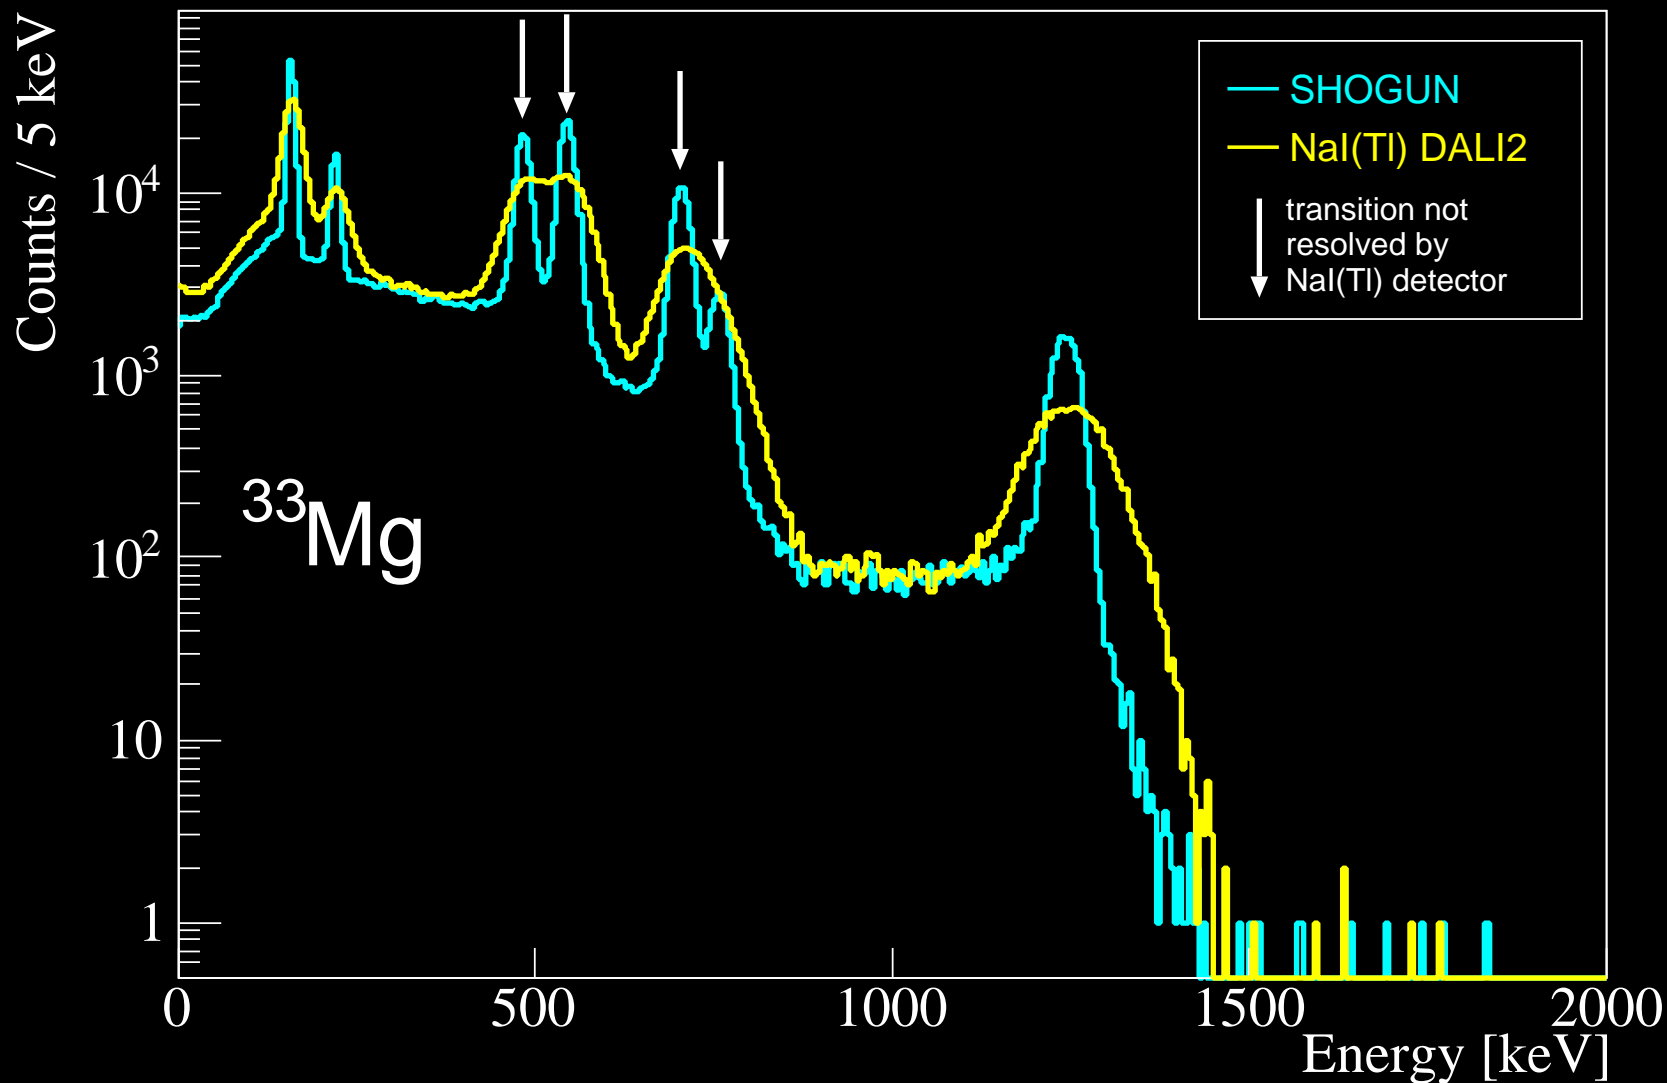


- $E/A = 250 \text{ MeV}/u$
- 1n-removal from ^{34}Mg



Simulation: SHOGUN 1000 and DALI2

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Detector Shape
- Configurations
- Setup at F8
- Simulation
- Simulation
- Simulation
- Energy Resolution
- FEP Efficiency
- SHOGUN 100
- Problems
- Alternatives
- Light Conversion
- Summary

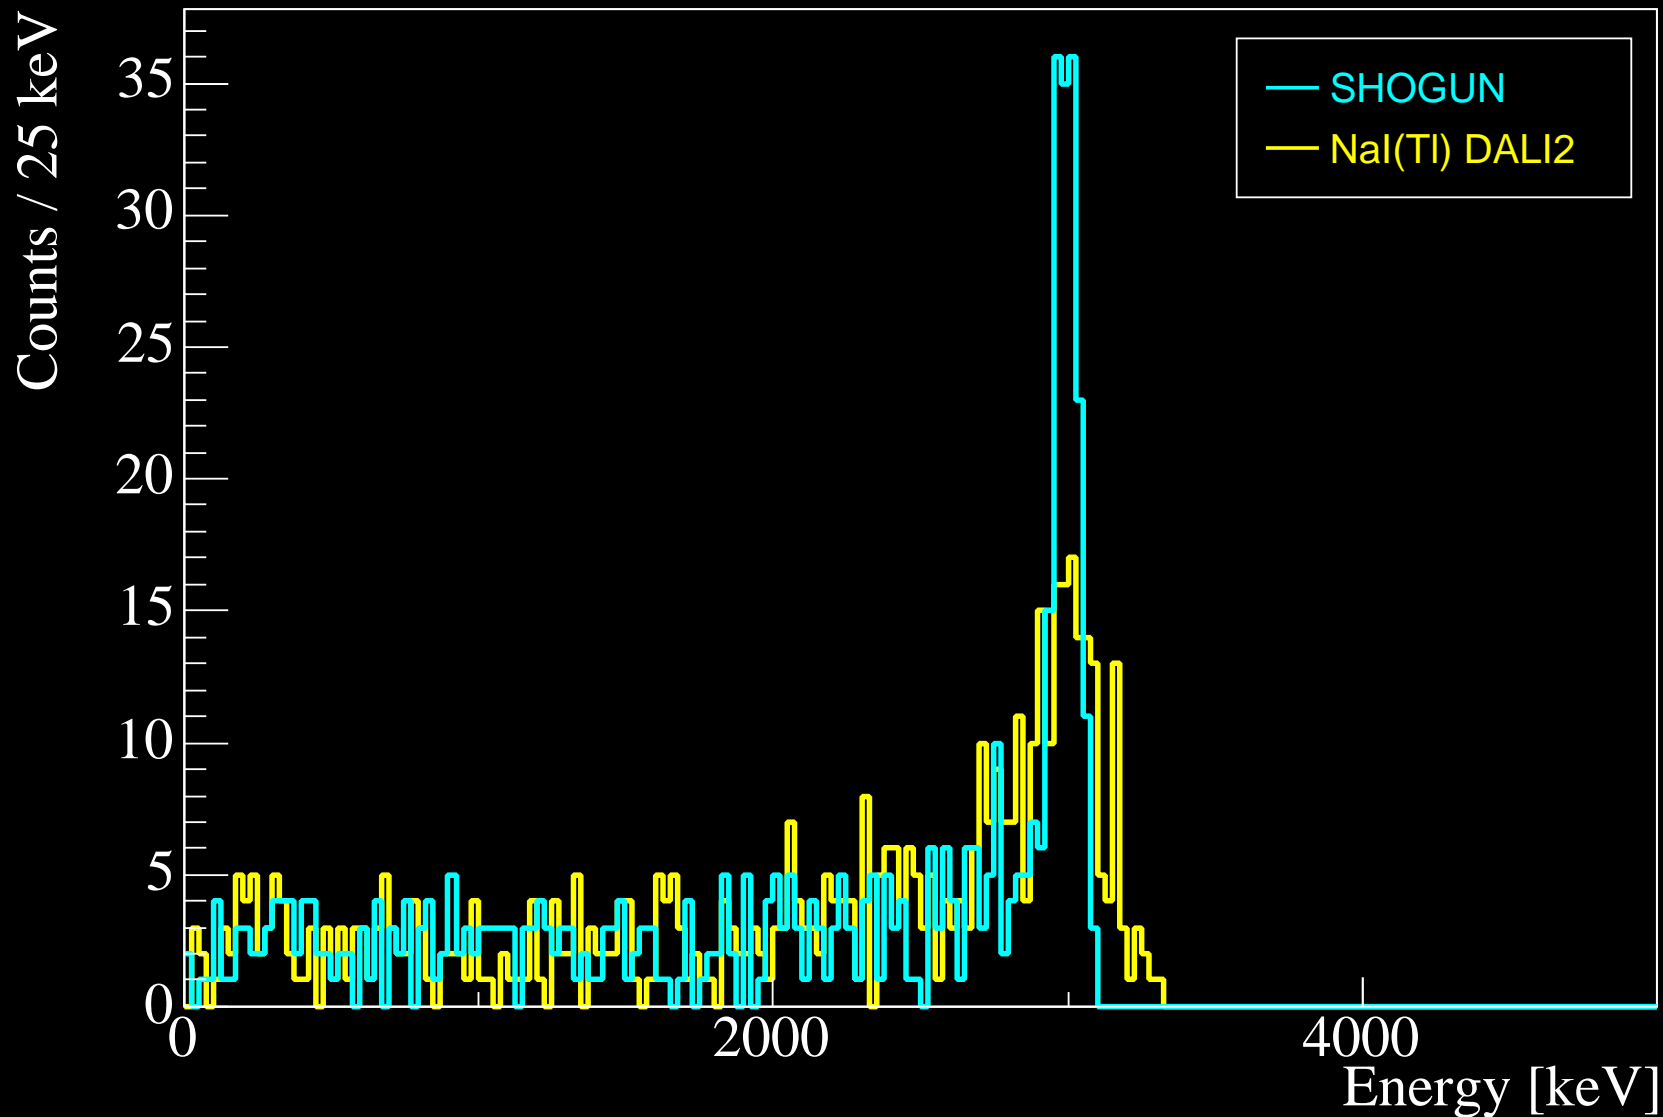


- $E/A = 250 \text{ MeV}/u$
- high-energy γ ray with low statistics



Energy Resolution

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Detector Shape Configurations
- Setup at F8
- Simulation
- Simulation
- Simulation
- Energy Resolution**
- FEP Efficiency
- SHOGUN 100
- Problems
- Alternatives
- Light Conversion
- Summary

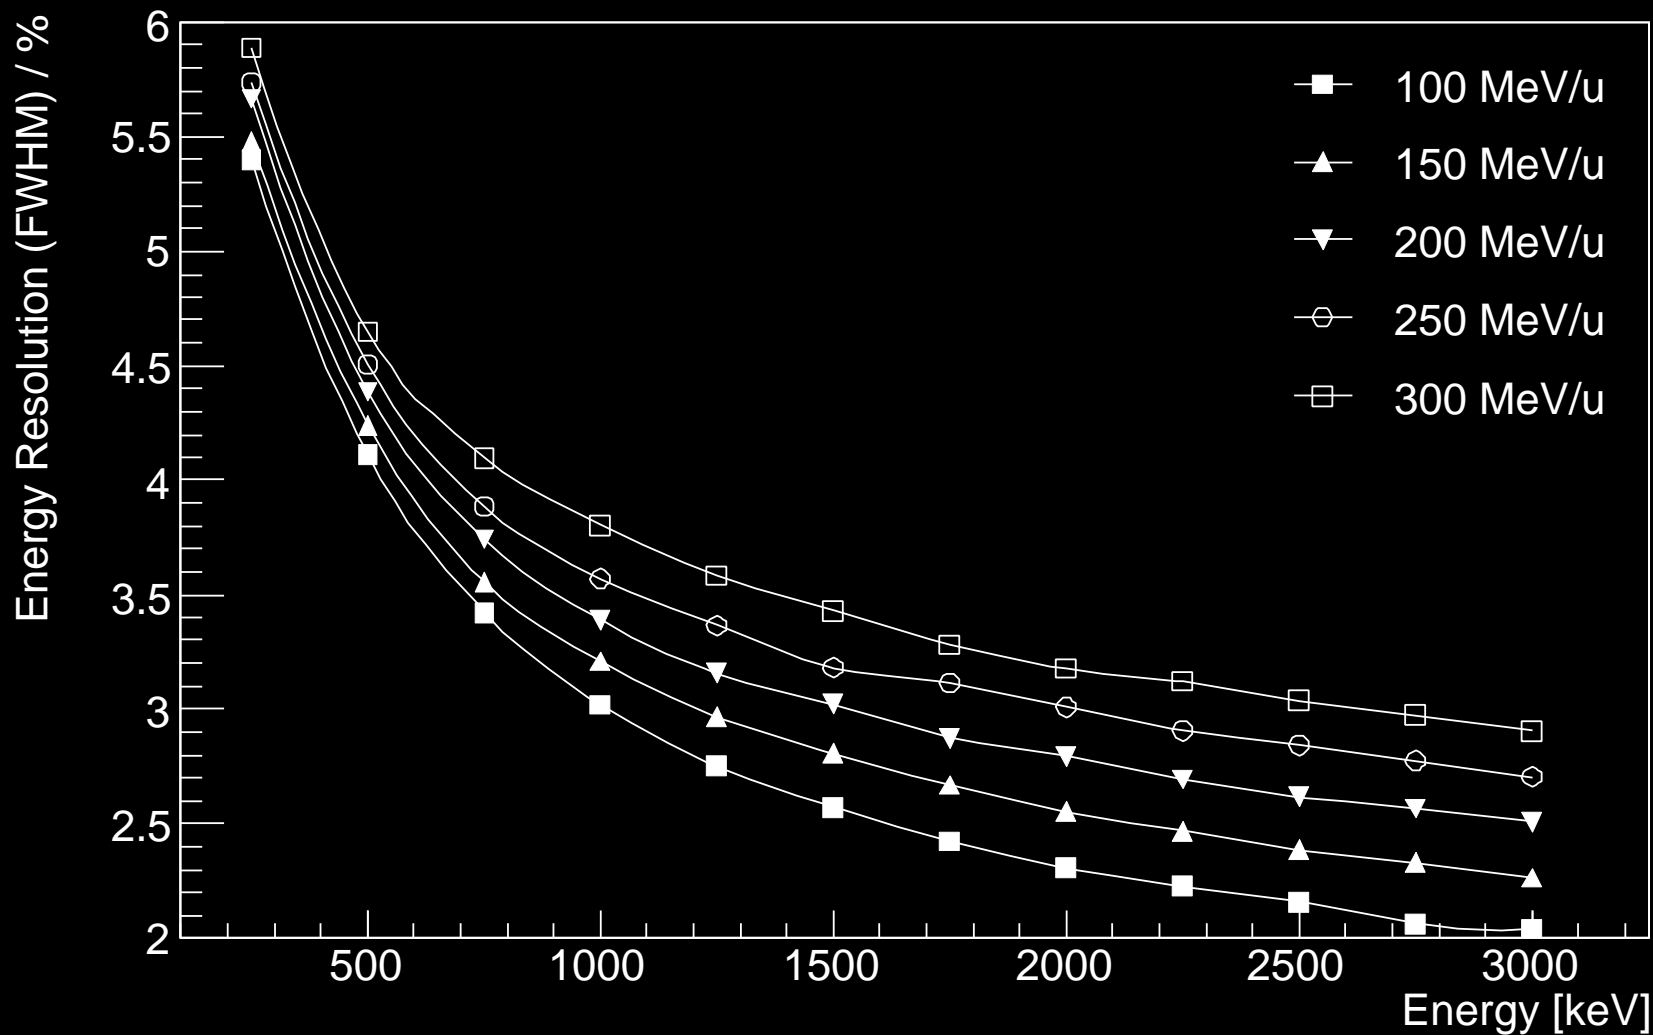


• typical: 3.5% at 1 MeV



Full Energy Peak Efficiency

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Detector Shape Configurations
- Setup at F8
- Simulation
- Simulation
- Simulation
- Energy Resolution
- FEP Efficiency
- SHOGUN 100
- Problems
- Alternatives
- Light Conversion
- Summary

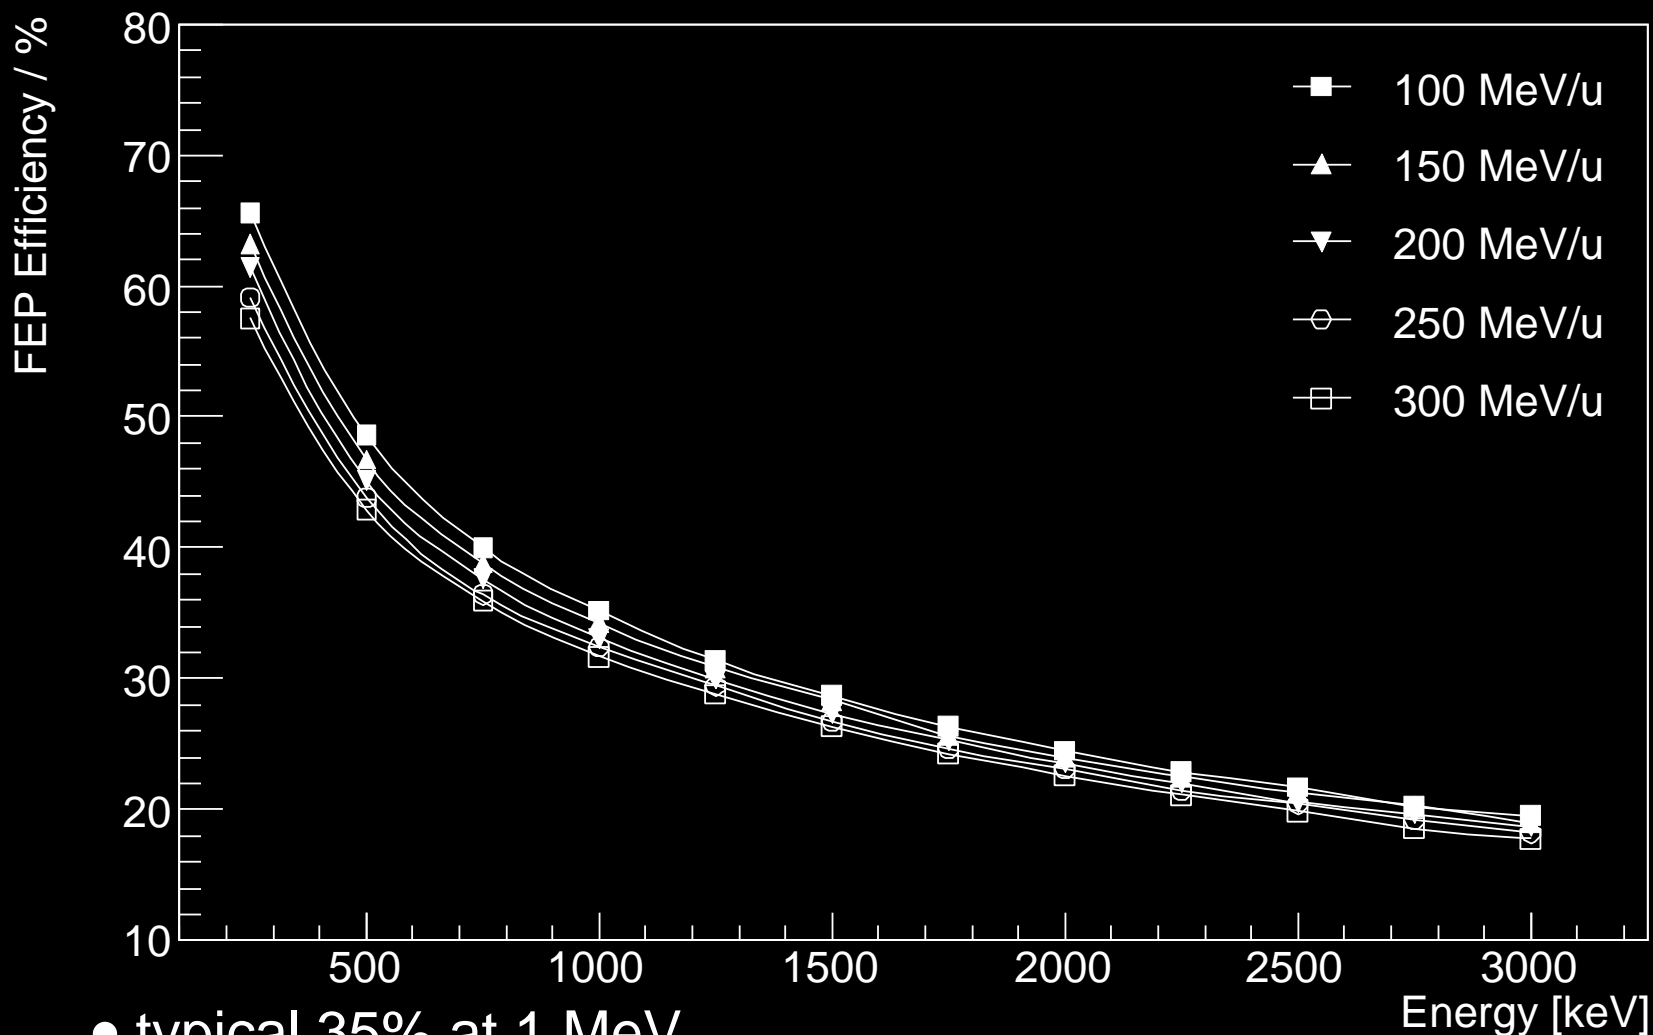

- typical 35% at 1 MeV
- can still be increased by
 - longer crystals (8 cm \rightarrow 10 cm)
 - tapered crystals, esp. for forward angles



SHOGUN 100 and DALI2

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Detector Shape

Configurations

Setup at F8

Simulation

Simulation

Simulation

Energy Resolution

FEP Efficiency


SHOGUN 100 |

Problems

Alternatives

Light Conversion

Summary

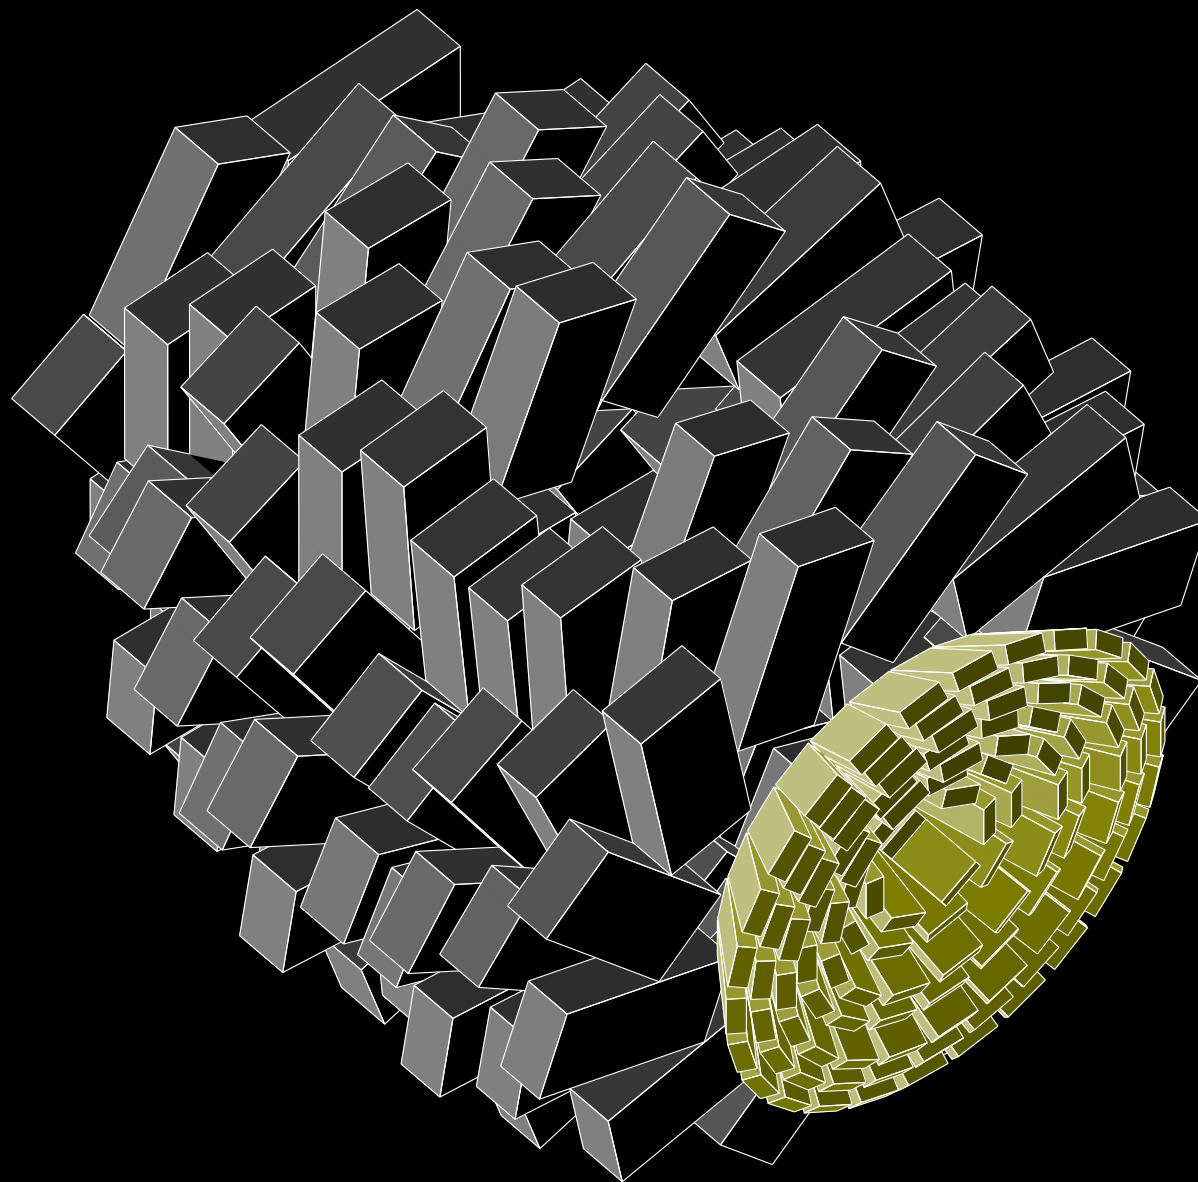



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems |

Procurement, Patent

Alternatives

Light Conversion

Summary

Problems



Procurement and Patent Issues

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Procurement, Patent

Alternatives

Light Conversion

Summary

- only one supplier: Saint-Gobain
US patent 7,067,816 B2 claims
 - $\text{La}_{1-x}\text{Ce}_x\text{Br}_3$ with $2\% < x < 90\%$
 - single crystal $> 10 \text{ mm}^3$ grown using Bridgeman process



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives |

Alternatives (1)

Alternatives (2)

Light Conversion

Summary

Alternatives



Alternatives (1)

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Alternatives (1) |

Alternatives (2)

Light Conversion

Summary

- $\text{LaCl}_3(\text{Ce})$: it seems there is no patent, but
 - **worse resolution** of 3.8% at 662 keV
 - relatively **strong slow component** in light output
 - high **temperature coefficient** (0.7%/K)
 - **low density**
- $\text{LaBr}_3(\text{Ce})$
 - who can produce $\text{LaBr}_3(\text{Ce})$ detectors
 - produce it ourselves?
 - when will patent expire (???)
 - larger detectors with position sensitivity?



Alternatives (2)

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Problems
- Alternatives
- Alternatives (1)
- Alternatives (2)**
- Light Conversion
- Summary

- liquid Xe detectors?
 - scintillator + electron drift
 - excellent energy resolution
 - who has experience?

- $\text{SrI}_2(\text{Eu})$:

	Z_{eff}	Light Yield (photons/MeV)	Energy Resolution (662 keV)	Emission Range	Decay Time (ns)	Non
$\text{SrI}_2:0.5\% \text{Eu}^{2+}$	50	68,000	5.3%	~400-460	1,100	
$\text{SrI}_2:2\% \text{Eu}^{2+}$	“	84,000	3.9%	“	“	
$\text{SrI}_2:5\% \text{Eu}^{2+}$	“	120,000	2.8% ^{**}	“	“	
$\text{SrI}_2:8\% \text{Eu}^{2+}$	“	80,000	4.9%	“	“	
$\text{LaBr}_3:\text{Ce}$	45.7	63,000 [*]	2.8% [*]	~325-425	15(97%),66(3%)	4%
$\text{SrI}_2:0.5\% \text{Ce}^{3+}/\text{Na}^+$	50	16,000	6.4%	~350-475	25(47%),159(53%)	8%
$\text{SrI}_2:2\% \text{Ce}^{3+}/\text{Na}^+$	“	11,000	12.3%	“	32(46%),450(53%)	6%

- e.g. Wilson *et al.*, Proc. of SPIE Vol. 7079 707917 (2008)
- no patent
- so far only very small crystals



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion |

PMT

Si-based

Summary

Light Conversion



Photo Multiplier Tubes

- low quantum efficiency
- high gain
 - too high for $\text{LaBr}_3(\text{Ce})$
 - light output of $\text{LaBr}_3(\text{Ce})$ a factor of **25** larger than $\text{NaI}(\text{TI})$
- low gain (only few dynodes) PMT needed
- probably still the best choice
- alternative are ...

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

PMT

Si-based

Summary



Si-based Light Conversion

- (p-i-n) photo diode (PD)
 - high quantum efficiency
 - no gain
 - capacitance scales with detection area

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

PMT

Si-based |

Summary



Si-based Light Conversion

- (p-i-n) photo diode (PD)
 - high quantum efficiency
 - no gain
 - capacitance scales with detection area
- avalanche photo diode (APD)
 - same as PD but gain of about 100
 - recently high resolution with $\text{LaBr}_3(\text{Ce})$ obtained
 - but, only small size (few mm)

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

PMT

Si-based |

Summary



Si-based Light Conversion

- (p-i-n) photo diode (PD)
 - high quantum efficiency
 - no gain
 - capacitance scales with detection area
- avalanche photo diode (APD)
 - same as PD but gain of about 100
 - recently high resolution with $\text{LaBr}_3(\text{Ce})$ obtained
 - but, only small size (few mm)
- silicon drift detectors (SDD)
 - high quantum efficiency
 - low capacitance independent of area
 - best resolution expected of 2.15% at 662 keV
(Moszynski *et al.*, IEEE Trans. Nucl. Sci.)
 - but, time resolution not good

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

PMT

Si-based

Summary



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary |

Current Status

Summary

Summary



Current Status

SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

Current Status |

Summary

- in contact with other groups: PARIS, Milano group
- prototype detectors being manufactured by Saint-Gobain
- SHOGUN workshop on Feb. 4-5
 - expand physics program
 - use at other (Japanese/East-Asian) facilities
- open questions
 - energy resolution of SHOGUN detectors
 - price per detector
 - funding: ?



Summary

- SHOGUN
- Doppler Effect
- In-beam γ at RIBF
- Which Detector?
- Lanthanum Bromide
- SHOGUN
- Problems
- Alternatives
- Light Conversion
- Summary
- Current Status
- Summary |

- We propose to build a next-generation **S**cintillator based **H**igh-res**O**lution **G**amma-ray spectrometer for **U**nstable **N**uclei (SHOGUN)
- advantages (fast beam)
 - high (optimum) resolution (3.5% FWHM at 1 MeV)
 - very high FEP efficiency (35%)
 - fast timing
 - **easy operation**
 - **very low running cost**
- workhorse for in-beam γ ray spectroscopy at the RIBF



SHOGUN

Doppler Effect

In-beam γ at RIBF

Which Detector?

Lanthanum Bromide

SHOGUN

Problems

Alternatives

Light Conversion

Summary

The End